




DO NOT SCALE. IF IN DOUBT ASK!

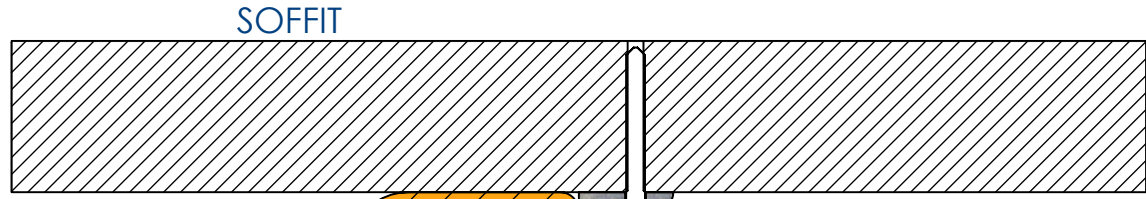

25mm x 25mm x 0.7mm MIN THICK CONTINUOUS GALVANISED ANGLE FIXED AT 250mm CENTRES USING FIRE RATED FIXINGS.

50mm x 25mm x 0.7mm THICK CONTINUOUS GALVANISED ANGLE FIXED TO SOFFIT AT 250mm (MAX) CENTRES USING FIRE RATED FIXINGS.

MINIMUM OF 100mm OVERLAP OF FIREFLY™ FOLDED BACK TO COVER ANGLE, SECURED BY FIREFLY™ HTA SCREWED INTO ANGLE AFTER THE FIXING AS SHOWN.

FIREFLY™ TITAN LITETM BARRIER

FIREFLY™ HIGH TEMPERATURE ADHESIVE

ALL RIGHTS RESERVED. NO PART OF THIS DRAWING MAY BE USED, REPRODUCED, ALTERED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE PRIOR WRITTEN PERMISSION OF TBA PROTECTIVE TECHNOLOGIES LTD. WHILST EVERY EFFORT HAS BEEN MADE TO COMPLY WITH THE CURRENT STATUTORY REGULATIONS, IT IS THE USER'S RESPONSIBILITY TO ENSURE THAT THE FINAL DETAILING AND INSTALLATION MEETS THE REQUIREMENTS OF RELEVANT REGULATORY AUTHORITY (OFTEN BUILDING CONTROL). PLEASE CHECK [www.tbafirefly.com](http://www.tbafirefly.com) TO ENSURE THAT YOU ARE USING THE CORRECT AND CURRENT VERSION. COPYRIGHT 2019

TBA Protective Technologies Ltd  
 Unit 3, Transpennine Trading Estate  
 Gorrells Way, Rochdale, OL11 2PX  
 United Kingdom  
 T: +44 (0)1706 758 817  
 E: [technical@tbafirefly.com](mailto:technical@tbafirefly.com)  
 W: [www.tbafirefly.com](http://www.tbafirefly.com)



Drawn By: RJ  
 Approved By: MPR  
 Scale: NTS  
 Date: 28/05/2020

Title: FIREFLY™ TITAN LITETM TOP FIX ANGLE TO ANGLE METHOD  
 Drawing No. T/002  
 Rev: 1