

7 6 5 4 3 2 1

DO NOT SCALE. IF IN DOUBT ASK!

THESE INSTRUCTIONS ARE FOR INSTALLING VERTICAL PROTECTION.
THE CENTRE ILLUSTRATION HAS BEEN ROTATED (90°) FOR VISUAL CLARITY.

150mm OF OVERLAP FOLDED OVER TO PROTECT ANGLE.

FIRE RATED FIXINGS SECURING THE BARRIER TO THE ANGLE
AT 600mm CENTRES.

2 BEADS OF FIREFLY™ HIGH TEMPERATURE ADHESIVE.

50 x 50 x 0.7mm MINIMUM THICK CONTINUOUS GALVANISED ANGLE.

25 x 25 x 0.7mm MINIMUM THICK CONTINUOUS GALVANISED ANGLE.


2 BEADS OF FIREFLY™ HIGH TEMPERATURE ADHESIVE.

FIRE RATED FIXINGS SECURING THE ANGLES TO EACH OTHER AT
250mm CENTRES.

FIRE RATED FIXINGS SECURING THE BARRIER TO THE ANGLE
AT 600mm CENTRES.

150mm OF OVERLAP FOLDED OVER TO PROTECT ANGLE.

THIS FIXING IS REQUIRED
EVERY 8000mm ALONG A
VERTICAL INSTALLATION.

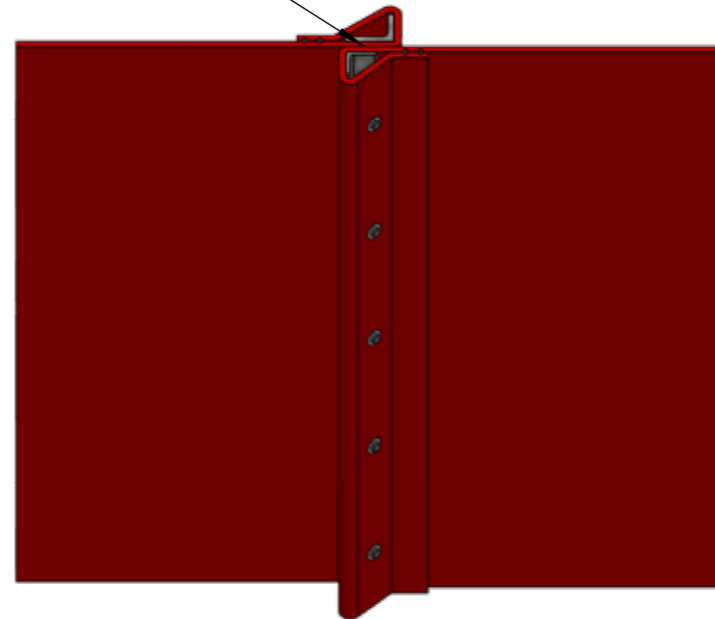

PHOENIX™ - CLAMP FIX DETAIL

TBA PROTECTIVE TECHNOLOGIES LTD
UNIT 3, Transpennine Trading Estate, Gorrells Way
Rochdale, OL11 2PX, United Kingdom
T: +44 (0)1706 758 817
E: Technical@TBAFIREFLY.com
W: www.tbafirefly.com

ARTIST: JC	DRAWING NO:
APPROVED: DA	P - 016
DATE: 07/12/2022	REVISION: 1
SCALE: NTS	IN SEQUENCE: 1/1



ALL RIGHTS RESERVED. NO PARTS OF THIS DRAWING MAY BE USED REPRODUCED, ALTERED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE PRIOR WRITTEN PERMISSION OF TBA PROTECTIVE TECHNOLOGIES LTD. WHILST EVERY EFFORT HAS BEEN MADE TO COMPLY WITH THE CURRENT STATUTORY REGULATIONS, IT IS THE USER'S RESPONSIBILITY TO ENSURE THAT THE FINAL DETAILING AND INSTALLATION MEETS THE REQUIREMENTS OF RELEVANT REGULATORY AUTHORITY (OFTEN BUILDING CONTROL). PLEASE CHECK www.tbafirefly.com TO ENSURE THAT YOU ARE USING THE CORRECT AND CURRENT VERSION. COPYRIGHT 2022

7 6 5 4 3 2 1